

THREE-PHASE

Standard Supply

Δ 220-240 / Y 380-415 V (...AA)*

Δ 290-305 / Y 500-525 V (...AG)*

Other on request

Fig. 1


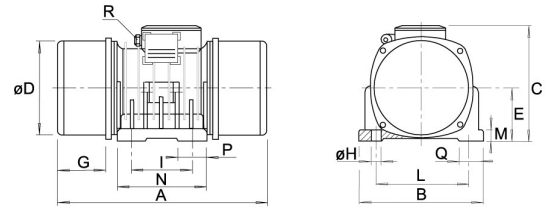


Fig. 2



GENERAL DATA			MECHANICAL DATA			ELECTRICAL DATA				OVERALL DIMENSIONS						FIXING DATA									
Model	Code	Sz.	SM V	CF V	WV	Input Power	Norm. Current			Ratio Fig.	A	B	C	D	E	G	Nr.	H	I	L	M	N	P	Q	R
			Static Mom. (kg*mm)	Centrif. Force (kg)	Weight (kg)		Δ (A)	Y (A)	Is/In																
SPV 0.7 A	SPV010A00B01AA	01.0	7,5	75	4,2	0,14	0,5	0,3	3,0	1	195	128	121	79	45	44	4	9	62	95-106	9	100	40	32	M14x1,5
SPV 1.2 A	SPV020A00B02AA	02.0	13	130	4,8	0,18	0,6	0,4	4,5	1	215	152	143	106	62	50	4	9	62-74	106	12	100	35	40	M16x1,5
SPV 1.8 A	SPV021A00B02AA	02.1	22	220	5,2	0,19	0,7	0,4	4,5	1	215	152	143	106	62	50	4	9	62-74	106	12	100	35	40	M16x1,5
SPV 2.7 A	SPV030A01B03AA	03.0	33	330	9,0	0,28	1,0	0,6	3,5	1	262	160	175	126	72	56	4	13	90	125	15	145	55	50	M16x1,5
SPV 4.5 A	SPV040A00B04AA	04.0	50	500	15,5	0,51	1,7	1,0	4,0	1	292	194	204	148	86	44	4	13	100	155	18	180	50	45	M20x1,5
SPV 7.0 A	SPV050A00B05AA	05.0	80	800	20,5	0,75	2,3	1,3	5,0	1	336	220	213	168	96	54	4	17	115	170	20	200	65	50	M20x1,5
SPV 9.0 A	SPV060A02B06AA	06.0	100	1.000	27,0	1,10	3,2	1,8	5,0	1	366	225	233	187	105	62	4	17	120	180	20	210	70	50	M20x1,5
SPV 12.0 A	SPV061A03B06AA	06.1	130	1.350	28,0	1,30	3,7	2,1	5,0	1	366	225	233	187	105	62	4	17	120	180	20	210	70	50	M20x1,5
SPV 15.0 A	SPV070A02B07AA	07.0	165	1.660	33,5	1,50	4,5	2,6	6,0	1	403	250	246	200	112	75	4	17	150	190	22	220	60	60	M20x1,5
SPX-50 19.0 A	SPX080A00B08AA	08.0	200	2.000	46,0	1,90	5,0	2,8	6,0	1	410	280	258	212	117	74	4	17	160	200	30	260	95	80	M20x1,5
SPX-50 25.0 A	SPX090A00B09AA	09.0	270	2.700	61,0	2,20	6,2	3,6	6,0	1	512	300	280	237	131	105	4	22	165	230	35	300	115	80	M20x1,5
SPV 32.0 A	SPV100A01B10AA	10.0	415	4.200	104,5	3,50	10,0	5,8	5,5	1	568	326	336	270	150	104	4	25	165	270	40	300	100	70	M25x1,5 + M16X1,5(TH)**
SPV 50.0 A	SPV110A01B11AA	11.0	560	5.630	143,0	5,00	14,0	8,0	6,0	1	609	355	362	308	166	110	4	29	210	295	40	330	100	70	M25x1,5 + M16X1,5(TH)**
SPV 60.0 A	SPV120A00B12AA	12.0	660	6.640	182,5	7,00	20,0	11,5	6,0	2	656	390	392	345	193	121	6	29	110	310	41	350	110	90	M25x1,5 + M16X1,5(TH)**
SPV 70.0 A	SPV130A01B13AA	13.0	750	7.600	210,0	8,00	22,5	13,0	6,0	2	686	390	414	345	192	121	6	29	115	320	45	370	115	75	M25x1,5 + M16X1,5(TH)**
SPV 85.0 A	SPV132A01B13AA	13.2	950	9.550	216,0	9,00	25,0	14,5	6,0	2	672	390	414	345	192	121	6	29	115	320	45	370	115	75	M25x1,5 + M16X1,5(TH)**

* see code on table
 ** TH = cable gland for thermistor connection

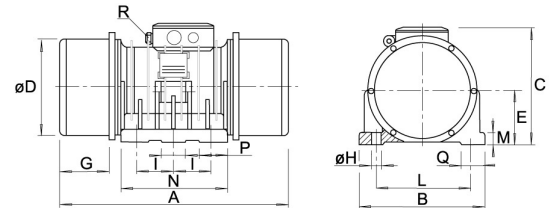