

KOMMA



**DIRECT
DRIVE**




TSUDAKOMMA

RDS SERIES

Tsudakoma RDS-200 Fanuc & Mitsubishi Controls

Model		RDS-200 F	RDS-200 M
Spindle diameter		83H7	83H7
Center height		160	160
Center bore	Nose Diameter	55H7	55H7
	Thru Diameter	45H7	45H7
Servo motor*		TSUDA-02 F	TSUDA-02 M
Speed reduction ratio		1/1	1/1
Maximum table speed rpm		300	300
Clamp system		Pneumatic	Pneumatic
Clamp torque @72psi Nm (ft. lbs.)		600 (443)	600 (443)
Indexing accuracy arc sec.		±10	±10
Indexing repeatability arc sec.		±2	±2
Net Weight kg (lbs.)		65 (144)	65 (144)
Allowable work weight kg (lbs)	kg (lbs)	100 (220)	100 (220)

Specifications subject to change without notice

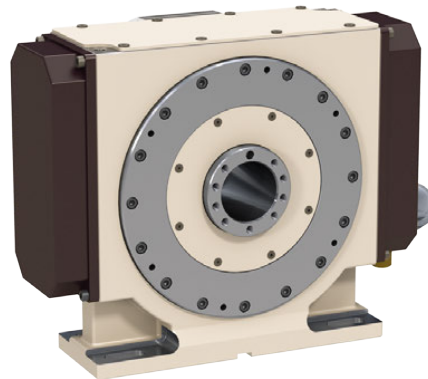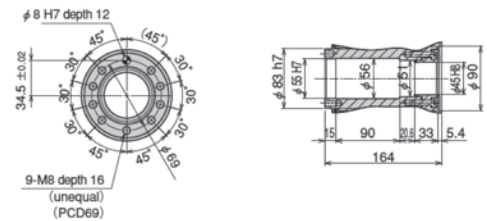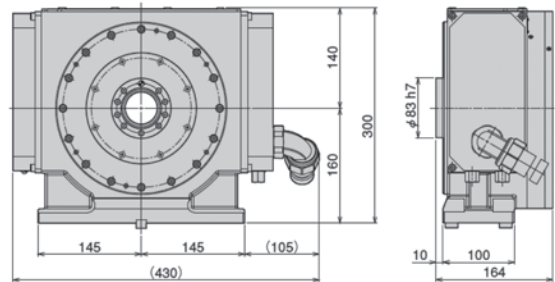

RDS-200

