

# Y-TYPE THREE WAY VALVE


## Features

- Designed for three hydraulic flow control positions.
- Common Port at base of the valve body.
- Base port thread sizes available in:  
Male threaded 1/4" - 19 BSPT or 1/4" - 18 NPT  
Male threaded 1/8" - 28 BSPT or 1/8" - 27 NPT
- Three Ports Thread: Female threaded 1/8" - 28 BSPT or 1/8" - 27 NPT
- Passage Size: 3.2mm (1/8")
- Max. Operating Pressure: 16 Bar/ 230Psi
- One moving part only.
- Three hydraulic control positions: Open, Close & Automatic.
- All valves are sealed when handle position in between port position.
- High quality Teflon/UHMW seals and Nickel plated brass ball.
- Plastic parts are Chemical/Corrosion resistant, Color UV stabilized.



## Material

S.No.	Parts Name	Material	Qty
1	Base	Brass	1
2	Base O-ring	EPDM	1
3	Ball	Nickel Plated Brass	1
4	Ball O-ring	EPDM	1
5	Body	Brass	1
6	Nozzle	Brass	3
7	Seal	Teflon (PTFE/UHMW)	3
8	Position Indicator	ABS	1
9	Handle	ABS	1
10	Screw	Stainless Steel	1

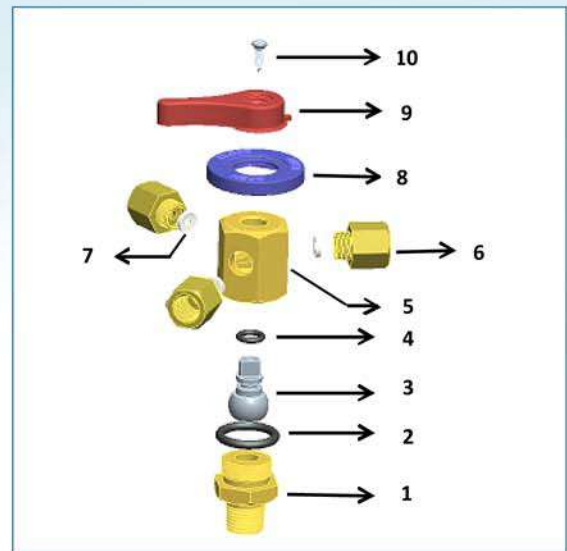

## Dimensions (in mm)

D	L	L1	L2	H	H1
33	43.5	13	58	53.2	12

