ACTIVA 10.35 for 10 GN 1/1 and 10 EN 60x40



TECHNICAL FEATURES

Model	Performance (+90°C/+3°C) (+90°C/-18°C)		Capacity in Trays	Standard Tension	Power Consumption	Refrigerant
MXT10.35	35 kg	22 kg	10 GN 1/1 10 EN 60x40*	230V / 1Ph 50Hz	1,7 kW 9,0 A	R404A or R452A 1,000 kg


CONSTRUCTIVE FEATURES




Structure insulation in CFC-free polyurethane DPO-0 - Door frame completely integrated in the structur e itself to grant top hygiene - Self-closing door equipped with a silicon e gasket resistant to low temperatures, magnetic and dheated door frame - Core probe with strong silicone gum grip as standard - Lateral drain hole for condensation and water run out - The technical room of evaporator and condenser can be easily inspected through a compass opening



INNER AND OUTER DIMENSIONS

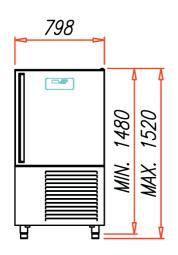

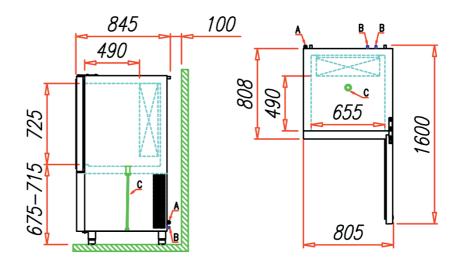

- A = Electrical and Water connection (when needed)
- B = Refrigeration connection
- C = Evaporator water drain pipe

TECHNICAL DATA

Model	Refrigerat *Te = -10°C	ing Power *Te = -30°C	Consumpti (+90°C/+3°C)	on kWh/kg (+90°C/-18°C)	Net Weight	Insulation Thickness	Room Conditions	Certifications
MXT10.35	3.200 W	1.150 W	0,10	0,32	150 kg	70 mm	+32°C 60% UR	CE

* Te = Expansion Temperature - Condensation Temperature = +45°C

ELECTRONIC CONTROLLER

Cycles available:

- Temperature blast chilling +3°C with core probe + c onservation stage
- Time blast chilling +3°C without core probe + conse rvation stage
- Temperature deep freezing -18°C with core probe + c onservation stage
- Time deep freezing -18°C without core probe + conse rvation stage
- SOFT and HARD cycles for both blast chilling +3°C or deep freezing -18°C
- Pre-cooling cycle
- Sterilizer (* optional)

Special functions:

- Automatic control on core probe insertion
- Core probe temperature visualization
- Visualization of elapsed time from start, customizable by user
- Raw fish sanitation cycle
- Manual and automatic defrost





Line ACTIVA

■ Core probe heating (* optional)

* Choice among one of these two optional: they cannot be installed together

ACCESSORIES (OPTIONAL)

0	Kit 4 Castors	ACC 141	Left Opening Door	ACC 135
O_3	Ozone Sterilizer	ACC 110	Heated Core Probe	ACC 509

DATA SHEET ACCORDING TO prEN 17032

DATA STILLT ACCORDING TO PILIT 17032							
Madal	Product	Refrigerating Gas			Program		
Model	Type	Type	GWP	Charge	Blast Chilling	Deep Freezing	
MXT10.35	BLAST CHILLER	R404A	2022	1,200 kg	HARD	TIME	
	DEEP FREEZER	or R452A	3922				
			•	•			

	Blast Chilling (+65°C / +10°C)			Deep Freezing (+65°C / -18°C)			
Model	Maximum Capacity	Energy Consumption	Time	Maximum Capacity	Energy Consumption	Time	
		E	t		Е	t	
MXT10.35	35 kg	0,08 kWh/kg	90 min	22 kg	0,32 kWh/kg	260 min.	

Manufacturer: A.T.O. S.R.L. - Via dell'Artigianato, 24 - 31030 Castello di Godego - Treviso - Italy

Tel. (+39) (0)423-768270 / Fax (+39) (0)423-469539 - web: www.sincold.com - E-mail: info@sincold.com